

# **SHENZHEN BOND OPTOELECTRONICS CO., LTD.**

---

---

## **SPECIFICATION FOR APPROVAL**

Customer: \_\_\_\_\_

Description:       SMD LED      

Model:       BDS-0603YC      

No.:       SD0022      

Date:       2006-04-06      

Enclosure is the specification

SHENZHEN BOND OPTOELECTRONICS CO., LTD.			
Production Dept.	Quality Dept.	Engineering Dept.	Marketing Dept.

APPROVED SIGNATURES			

Add: B501, Seat 5, YongLeXinCun, Nanshan District, Shenzhen, China

Tel: 0086-755-26685446

Fax: 0086-755-26822679

Email: Allen@bond-led.com


Website: <http://www.Bond-led.com>

**BDS-0603YC YELLOW****Features**

- 1)1.6mmx0.8mm SMT LED, 0.7mm THICKNESS.
- 2)LOW POWER CONSUMPTION.
- 3)WIDE VIEWING ANGLE.
- 4)IDEAL FOR BACKLIGHT AND INDICATOR.
- 5)VARIOUS COLORS AND LENS TYPES AVAILABLE.
- 6)PACKAGE: 3000PCS/REEL.

**Description**

The Yellow source color devices are made with InGaAlP Light Emitting Diode.

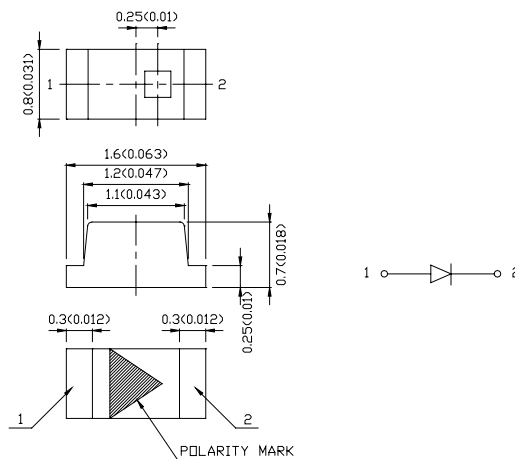**Package Dimensions****Notes:**

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.1$  (  $0.004''$  ) unless otherwise noted.
3. Specifications are subject to change without notice.

**Selection Guide**

Part No.	Dice	Lens Type	Iv (mcd) @20mA		Viewing Angle
			Min.	Typ.	2 θ 1/2
BDS-0603YC	Yellow<GaAsP/GaP>	Water Clear	2.6	8	120°

Note:

1. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

**Electrical / Optical Characteristics at TA=25° C**

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λ peak	Peak Wavelength	Yellow	590		nm	IF=20mA
λ D	Dominate Wavelength	Yellow	588		nm	IF=20mA
Δ λ 1/2	Spectral Line Half-width	Yellow	28		nm	IF=20mA
C	Capacitance	Yellow	25		PF	VF=0V;f=1MHz
VF	Forward	Yellow	2.1	2.5	V	IF=20mA
IR	Reverse Current	Yellow		10	uA	VR=5V


**Absolute Maximum Ratings at TA=25° C**

Parameter	Yellow	Units
Power dissipation	105	mW
DC Forward Current	30	mA
Peak Forward Current (1)	140	mA
Reverse Voltage	5	V
Operating/Storage Temperature	-40° C To +85° C	


Note:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.


Relative Intensity Vs Wavelength Chart

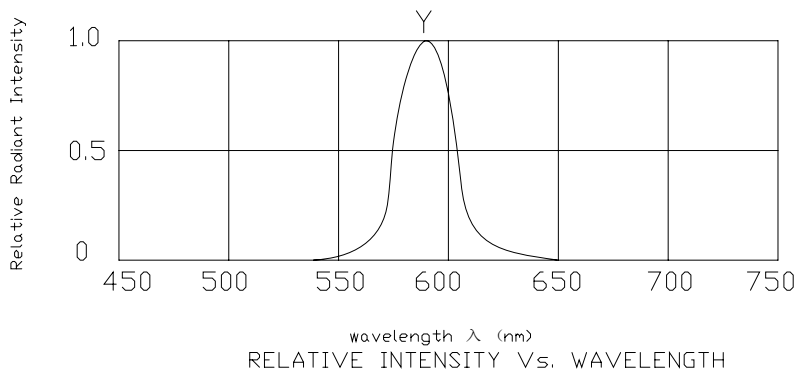


Yellow BDS-0603YC

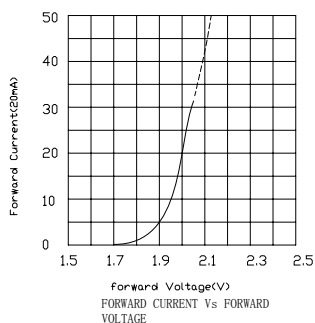


正向电流与正向电压关系曲线图

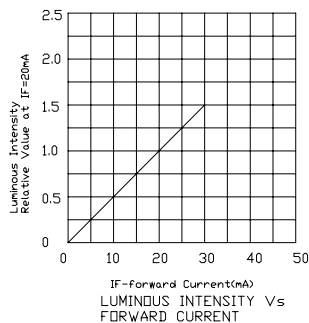


亮度与正向电流关系曲线图

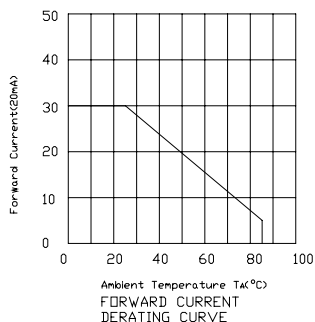

正向电流递减曲线图

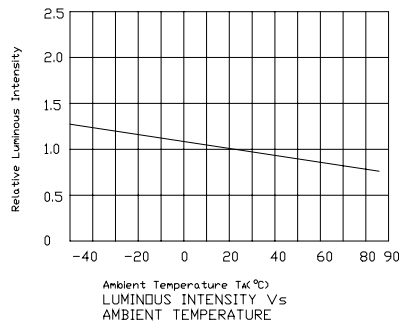

亮度与环境温度关系曲线图

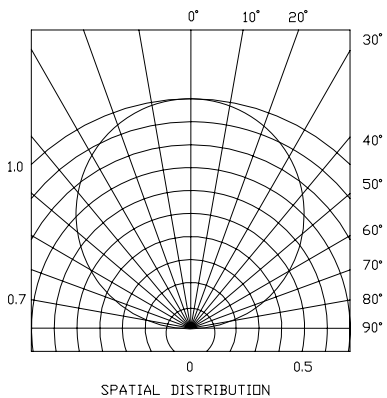


发光角度图解

**BDS-0603YC**


**SMT Reflow Soldering Instructions**

Number of reflow process shall be less than 2 times and cooling process to normal temperature is required between first and Second soldering process.

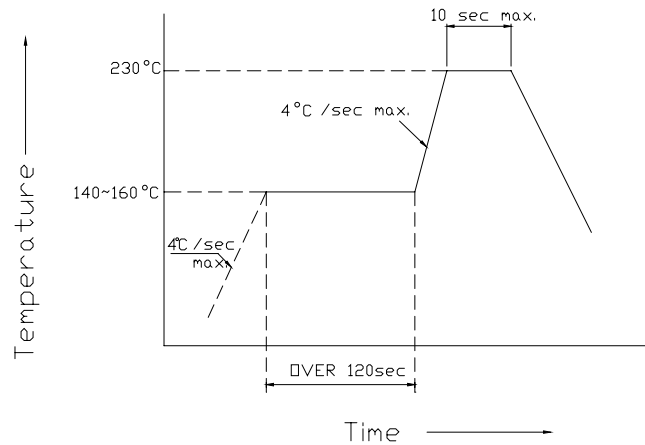


**Recommended Soldering Pattern**

<Units:mm>

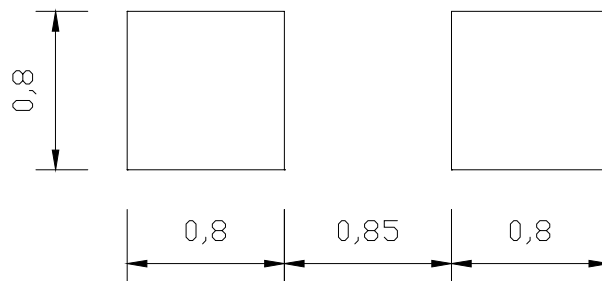

**Tape Specifications**

<Units:mm>

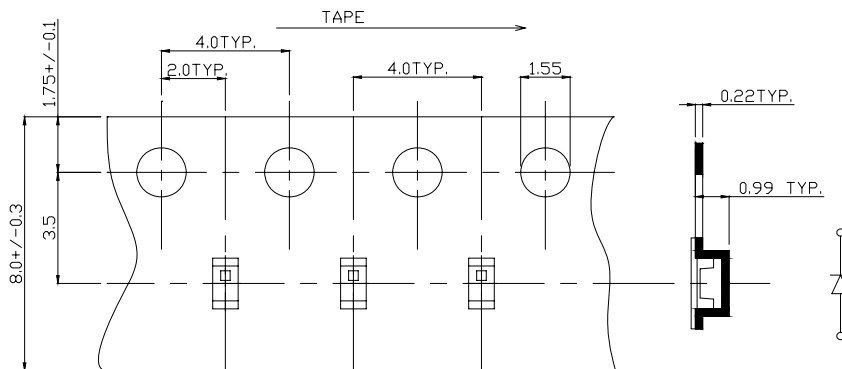

**RELIABILITY****(1) TEST ITEMS AND RESULTS**

Test Item	Standard Test Method	Test Conditions	Note	Number of Damaged
Resistance to Soldering Heat (Reflow Soldering)	JEITA ED-4701 300 301	Tsld=260°C, 10sec. (Pre treatment 30°C,70%,168hrs)	2 times	0/50
Solderability (Reflow Soldering)	JEITA ED-4701 300 303	Tsld=215±5°C, 3sec. (Leader Solder)	1 time over 95%	0/50
Thermal Shock	JEITA ED-4701 300 307	-40°C~100°C 5min. 5min.	100cycles	0/50
Temperature Cycle	JEITA ED-4701 100 105	-40°C~25°C~100°C~25°C 30min. 5min. 30min. 5min.	100cycles	0/50
Moisture Resistance Cycle	JEITA ED-4701 200 203	25°C~65°C~-10°C 90%RH 24hrs./1cycle	10 cycles	0/50
High Temperature Storage	JEITA ED-4701 200 201	Ta=100°C	1000 hrs	0/50
Temperature Humidity Storage	JEITA ED-4701 100 103	Ta=60°C, 90%RH	1000 hrs	0/50
Low Temperature Storage	JEITA ED-4701 200 202	Ta=-40°C	1000 hrs	0/50
Steady State Operating Life		Ta=25°C, IF=20mA	1000 hrs	0/50
Steady State Operating Life of High Temperature		Ta=85°C, IF=5mA	1000 hrs	0/50
Steady State Operating Life of High Humidity Heat		60°C, 90%RH, IF=15mA	500 hrs	0/50
Steady State Operating Life of Low Temperature		Ta=-30°C, IF=20mA	1000 hrs	0/50
Drop		H=75cm	3 cycles	0/50
Substrate Bending	JEITA ED-4702	3mm, 5 ± 1 sec.	1 time	0/50
Stick	JEITA ED-4702	5N, 10 ± 1 sec.	1 time	0/50

**(2) CRITERIA FOR JUDGING THE DAMAGE**

Item	Symbol	Test Conditions	Criteria for Judgement	
			Min.	Max.
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	-	U.S.L.*)X1.1
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	-	U.S.L.*)X2.0
Luminous Intensity	I <sub>V</sub>	I <sub>F</sub> =20mA	L.S.L.***)X0.7	-

\*) U.S.L.: Upper Standard Level

\*\*) L.S.L.: Lower Standard Level

**Intensity And Color Bin Limits**

**(1)Intensity Bin Limits (IF=20mA)**

SELECTION CODE FOR SUPER BRIGHT LEDS		
Group	Light intensity in mcd(20mA) Yellow	
	Min.	Max.
A	1.6	3.5
B	2.6	5.5
C	4	10
E	7	15
E	10	24

Tolerance for each Bin limit is ±0.15.

**(2)Color Bin Limits (IF=20mA)**

COLOR CODE FOR LEDS + DISPLAYS		
Group	Dom. WaveLength (nm)	
	Super Bright Yellow	
	min.	max.
1	581	584
2	584	586
3	586	588
4	588	590
5	590	592
6	592	594
7	594	597
8	597	600

Tolerance for each Bin limit is ±0.15.